

SPIKA NG 360












115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTEM, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALCLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / STAINLESS STEEL ADJUSTABLE LEGS.



<div></div>	<div><div>70°F/20°C</div></div> <div><div>lbs (Kg)</div></div>	<div><div>50°F/10°C</div></div> <div><div>lbs (Kg)</div></div>	<div><div>90°F/32°C</div></div> <div><div>lbs (Kg)</div></div>	<div></div> <div><div>lbs (Kg)</div></div>	<div></div> <div><div>in (mm)</div></div>	<div></div> <div><div>in (mm)</div></div>	<div><div>SPIKA HALF DICE 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions</div></div>
SPIKA NG 360 H 	<div>340 (154)</div>	<div>273 (124)</div>	<div>99 (45)</div>	Width <div>30" (762)</div>	Width <div>33.08"(840)</div>	<div><div>SPIKA FULL DICE 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions</div></div>	
SPIKA NG 360 F 	<div>340 (154)</div>	<div>273 (124)</div>		Depth <div>30" (762)</div>	Depth <div>32.48"(825)</div>		Height <div>37.41"(950)</div>

* WITH LEGS 39"

ACCESSORIES

INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



WATER OUTLET HOSE



SCOOP

NOT INCLUDED



11" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-111 K



11" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS11




SCALE KLEEN


TECHNICAL SCHEME

SPIKA NG 360


SIDE VIEW

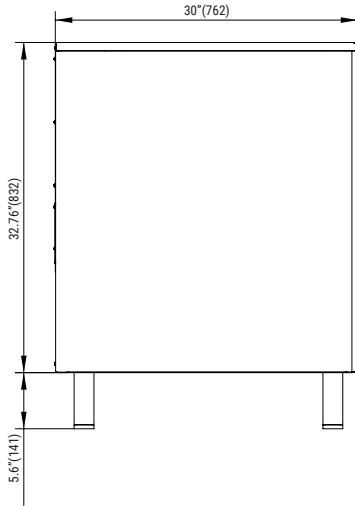

FRONTAL VIEW

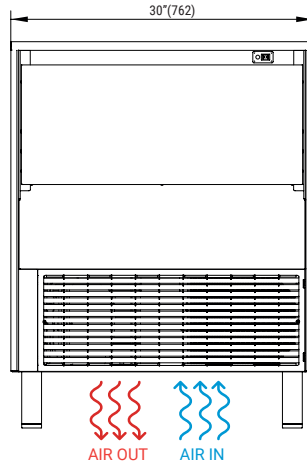

REAR VIEW

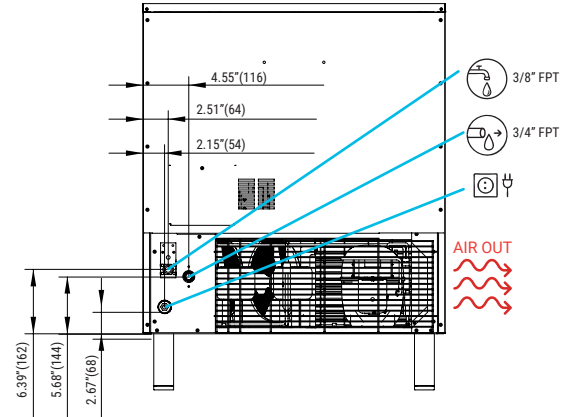

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz


±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

144/288 Ice cubes/cycle



V	Hz	ph
115	60	1N

MODELS	Kwh/100 lbs	Water Usage (Gal/100 lbs)	Ice Production (70/50)	Ice Production (90/70)	External Dimensions (inches)			Voltage /Hz /ph	Amp	Heat Rejected (BTU/hr)	Net Weight (lbs)	Crated Weight (lbs)
					W	D	H					
SPIKA NG 360 H	4.62	21.32	340	273	30	30	32.76	115/60/1	8.9	5,353	163	187.5
SPIKA NG 360 F	4.62	21.32	340	273	30	30	32.76	115/60/1	8.9	5,353	163	187.5



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

