



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Encore® Single Wall Mount Wok Spout Base with 18" Double Jointed Tubular Swing Spout and Shut-Off Valve

KL72-9018-SV1



Solid heavy duty cast body is specification and commercial quality


Commercial Quality Features

- Tubular swing spout design
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Wok Spout Base to be Encore KL72 -9018-SV1.

Faucet base to be constructed of polished chrome plated brass. Spout to be 18" double jointed stainless steel tubular swing style with leak proof double O-ring seal design.

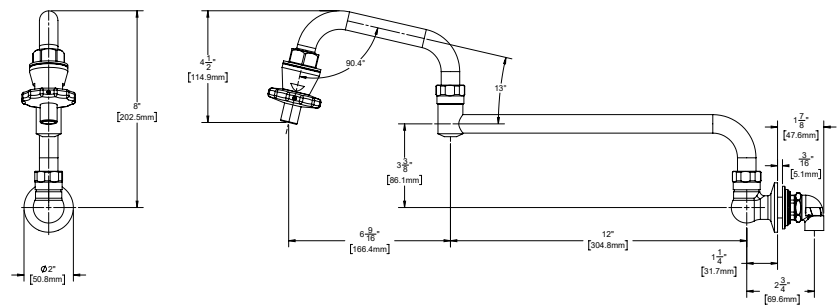

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for backsplash is recommended to accommodate 1/2" supply nipple
1/2" NPT Female Inlet
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi

Approximate shipping weight - 2 lbs
Warranty - 2 years parts

COMPLIES WITH:
ASME A112.18.1-2005
CSA B125.1-05
NSF/ANSI 61/9, ANNEX G
SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)
VERMONT ACT 193
UNIFORM PLUMBING CODE

